

SPLIT TİP SOĞUTMA ÜNİTELERİ / SPLIT TYPE REFRIGERATION UNITS

SOĞUK ODALAR / COLD SERIES (-5°C / +5°C) R22 / R404 A

Tip	Hp	P (KW)	Besleme	Capacity R22 watt	Capacity R404 watt	Kondenser	Fan	Gas
Type		R22 R404 A	Power Supply	SC2 (-10°C/+45°C)	SC2 (-10/+45)	Condenser	Ø(mm)	Charge
DP-M075M	0.75	1.03	1.15	230V/50Hz	1.224	1.296	7.8m²	1x300
DP-M100M	1.00	1.23	1.39	230V/50Hz	1.488	1.572	8.5m²	1x300
DP-M125M	1.25	1.47	1.64	230V/50Hz	1.757	1.871	8.5m²	1x300
KP-M150M	1.50	2.32	2.58	230V/50Hz	2.795	2.951	15m²-16m²	2x300
KP-M150T	1.50	2.26	2.57	400V/50Hz	2.795	2.951	15m²-16m²	2x300
KP-M200M	2.00	2.62	2.70	230V/50Hz	2.981	3.042	16m²	2x300
KP-M200T	2.00	2.62	2.72	400V/50Hz	2.981	3.048	16m²	2x300
OP-M200M	2.00	2.42	2.50	230V/50Hz	2.981	3.042	20m²	1x400
OP-M200T	2.00	2.42	2.52	400V/50Hz	2.981	3.048	20m²	1x400
OP-M250M	2.50	3.17	3.20	230V/50Hz	4.250	4.042	20m²	1x400
OP-M250T	2.50	3.10	3.20	400V/50Hz	4.250	3.968	20m²	1x400
OP-M300M	3.00	4.11	4.27	230V/50Hz	5.214	5.060	25m²	1x450
OP-M300T	3.00	4.11	4.20	400V/50Hz	5.214	5.173	25m²	1x450
OP-M400T	4.00	4.26	4.38	400V/50Hz	5.451	5.457	30m²	1x450
BP-M500T	5.00	5.62	5.70	400V/50Hz	7.465	7.107	40m²	2x400
BP-M600T	6.00	6.33	6.40	400V/50Hz	8.383	8.477	50m²	2x450
BP-M700T	7.00	7.18	7.20	400V/50Hz	9.201	8.156	60m²	2x450

SERİN ODALAR / COOL SERIES (+5°C / +16°C) R22 / R404 A


Model	Hp	P (KW)	Besleme	Capacity R22	Capacity R404	Kondenser	Fan	Gas
		R22 R404 A	Power Supply	SC1 (0/+45) watt	SC1 (0/+45) watt	Condenser	Ø(mm)	Charge
DP-H075M	0.75	1.03	1.15	230V/50Hz	1.808	1.874	7.8m²	1x300
DP-H100M	1.00	1.23	1.39	230V/50Hz	2.177	2.312	8.5m²	1x300
KP-H125M	1.25	1.66	1.83	230V/50Hz	2.749	2.884	12m²	2x300
OP-H150M	1.50	2.32	2.58	230V/50Hz	4.112	4.386	15m² / 20m²	1x400
OP-H150T	1.50	2.26	2.57	400V/50Hz	4.112	4.386	15m² / 20m²	1x400
OP-H200M	2.00	2.42	2.50	230V/50Hz	4.717	4.813	25m²	1x450
OP-H200T	2.00	2.42	2.50	400V/50Hz	4.717	4.833	25m²	1x450
OP-H250M	2.50	3.24	3.27	230V/50Hz	6.462	6.264	25m²	1x450
OP-H250T	2.50	3.18	3.28	400V/50Hz	6.462	6.143	25m²	1x450
OP-H300M	3.00	4.11	4.27	230V/50Hz	8.372	7.724	30m²	1x450
OP-H300T	3.00	4.11	4.20	400V/50Hz	8.372	7.861	30m²	1x450
BP-H400T	4.00	4.37	4.49	400V/50Hz	9.038	9.061	40m²	2x400
BP-H500T	5.00	5.76	5.84	400V/50Hz	12.105	11.363	50m²	2x450
BP-H600T	6.00	6.33	6.40	400V/50Hz	13.652	13.253	60m²	2x450
BP-H700T	7.00	7.45	7.46	400V/50Hz	14.632	14.224	60m²	2x500

DONMUŞ SERİ / DEEP FREEZE SERIES (-23°C / -18°C) R404 A


Model	Hp	P (KW)	Besleme	Capacity R404	Kondenser	Fan	Gas
		R404 A	Power Supply	SC3 (-25/+45) watt	Condenser	Ø(mm)	Charge
DP-L075M	0.75	0.79	230V/50Hz	847	7.8m²	1x300	-
DP-L100M	1.00	1.10	230V/50Hz	1.000	8.5m²	1x300	1.25
KP-L150M	1.50	1.59	230V/50Hz	1.285	12m²	2x300	2.00
KP-L150T	1.50	1.30	400V/50Hz	1.292	12m²	2x300	2.00
OP-L200M	2.00	1.73	400V/50Hz	1.865	20m²	1x400	3.00
OP-L300M	3.00	2.31	400V/50Hz	2.518	25m² / 30m²	1x450	3.00
BP-L500M	5.00	3.32	400V/50Hz	3.687	40m²	2x400	5.00
BP-L700M	7.00	4.10	400V/50Hz	4.702	40m² / 50m²	2x400 / 2x450	6.00

*Yukarıdaki tablolarda verilen kapasiteler L'Unité Hermetique marka kompresöre göre verilmiştir. Farklı markalarda kapasiteler değişebilir.
*Gaz şarjı ±%10 olarak yazılmıştır.


BP - TYPE

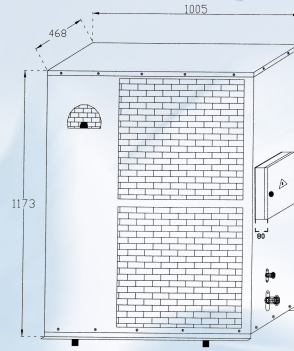

DP - TYPE



OP - TYPE



KP - TYPE

